






## Smartflo

- Automatically adjusts flow to meet outlet demand
- No accumulator tank required
- Filter included
- Universal mounting arrangement fits any existing installation
- Smooth constant flow
- Self-priming up to 3m (10ft)
- Runs dry without damage
- Extra protection and safety with wires and pressure switch housed internally

### Model Specifications

Model	8 Litre Model
Product Code	UF0814
Flow Rate	8ltrs (2.2 US gals)
Voltage	12V D.C.
Cut Out Pressure	2 bar (30 psi)
Recommended Fuse Size	5 amp
Weight	1.9kg (4.2 lbs)
Inlet/ Outlet size	Whale Quick Connect 12mm OD Female
Hose Connections	For 1/2" Flexible Hose Use WU1282 (supplied with pump) For 3/8" Flexible Hose Use WU1280 (not supplied with pump)
Semi-rigid Pipework System Connections	For Whale Quick Connect 12mm NO ADAPTOR REQUIRED For Whale Quick Connect 15mm use 12mm semi-rigid pipe WX7112 and WU1512 (not supplied with pump)
Materials in Contact With Fluid	Glass-filled Polypropylene, Monprene®, Nitrile, Stainless Steel
Service Kits	Microswitch AK1317 Replacement Head AK1318 Strainer AK1320
Recommended Wire Size	2.5mm <sup>2</sup> (13AWG)
Maximum Discharge Head	20m (66ft)
Maximum Suction Lift	3m (10ft)

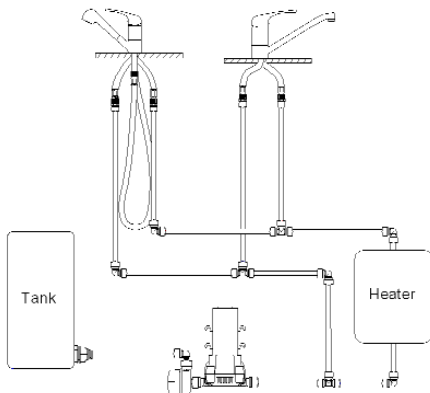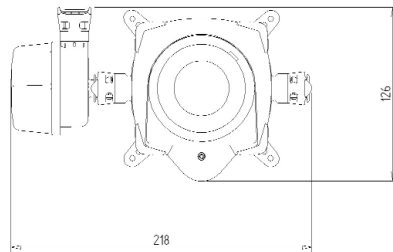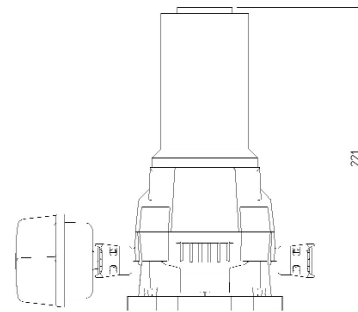

Typical Installation

